




ESCAPE AND RESCUE WINDOWS

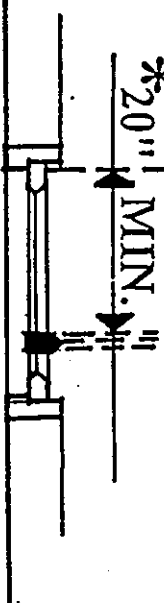


CASEMENT

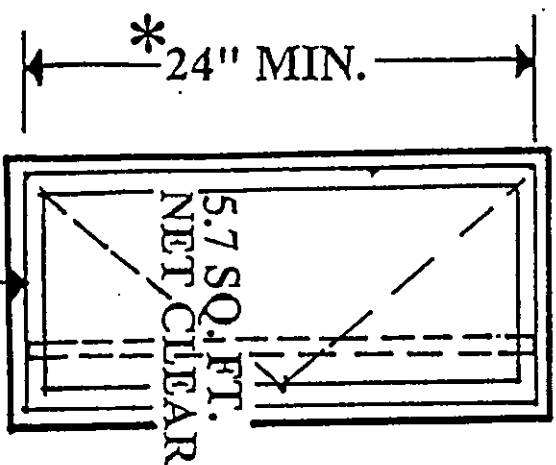

DOUBLE HUNG

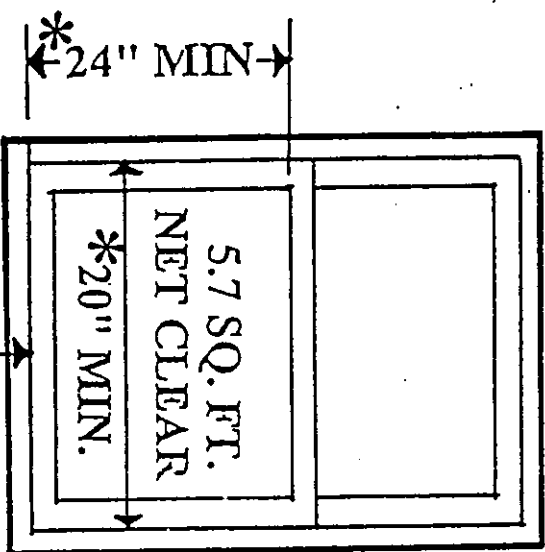

SLIDE BY

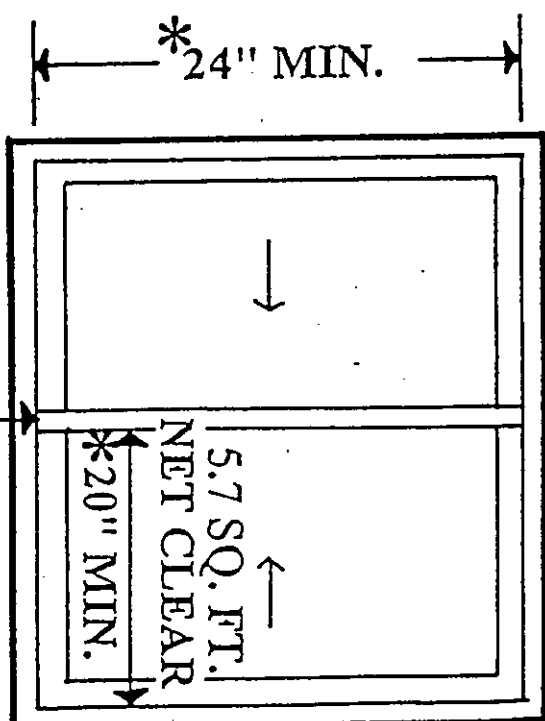

MAXIMUM OF 44 INCHES MEASURED FROM FLOOR TO HIGHEST PORTION OF SILL

***PLEASE NOTE THAT THE 20" AND 24" DIMENSIONS ARE THE MINIMUMS EACH WAY, AND THAT YOUR NET CLEAR OPENING MUST BE 5.7 SQ. FT. EXAMPLE: IF YOUR OPENING WIDTH IS AT THE 20" MINIMUM, YOU WILL NEED A CLEAR OPENING HEIGHT OF 41" TO ARRIVE AT THE MINIMUM NET CLEAR OPENING OF 5.7 SQ. FT. ($3.42' \times 1.66' = 5.7$)

All emergency escape and rescue openings shall have a minimum net clear opening of 5.7 square feet.
 Exception: *Grade floor openings shall have a minimum net clear opening of 5 square feet.
 *A grade floor opening: window or opening with a sill height not more than 44 inches above or below the finished grade.

Min. Emergency Escape & Rescue Opening Net Clear Height & Width Requirements For 5.7 ft² (820.8 square inches)

	W	20.00	20.50	21.00	21.50	22.00	22.50	23.00	23.50	24.00	24.50	25.00	25.50	26.00	26.50	27.00	27.50	28.00	28.50	29.00	29.50	30.00	30.50	31.00	31.50	32.00	32.50	33.00	33.50	34.00
H	41.00	40.00	39.25	38.25	37.50	36.50	35.75	35.00	34.25	33.50	33.00	32.25	31.75	31.00	30.50	30.00	29.50	29.00	28.50	28.00	27.50	27.00	26.50	26.00	25.50	25.00	24.50	24.00	23.50	23.00

Min. Emergency Escape & Rescue Opening Net Clear Height & Width Requirements For 5.0 ft² (720 square inches)

Width	20.00	20.50	21.00	21.50	22.00	22.50	23.00	23.50	24.00	24.50	25.00	25.50	26.00	26.50	27.00	27.50	28.00	28.50	29.00	29.50	30.00
	Height	36.00	36.25	34.50	33.50	32.75	32.00	31.50	30.75	30.00	29.50	29.00	28.25	27.75	27.25	26.75	26.25	25.75	25.50	25.00	24.50

